

B 18 / B 18 W



PRODUCT FEATURES

- Adaptive Port Design, reduces distortion and airflow noise
- 2400 W peak power @ 8 Ω, 138 dB max SPL
- Extended Connectivity, convenient multiple speakON[®] sockets on front and rear, allowing easy set up, ideal for live performances
- 15-18 mm plywood housing
- Octopus Feet, increase slip resistance and stability
- Flexibility, smaller, lighter, scalable
- Suitable for various configurations
- Road-Ready, allows optimal packing and easy transport on euro-pallets and -trucks
- Additional Accessories: Dedicated dolly boards and padded slipcovers

SPECIFICATIONS


ELECTRO-ACOUSTICAL	
Low cut-off frequency (-3 dB)	38 Hz
Low cut-off frequency (-10 dB)	27 Hz
Nominal impedance	8 Ω
Sensitivity *	98 dB
Average power handling **	600 W
Peak power	2400 W
Maximum Peak SPL ***	138 dB
Coverage	Omnidirectional
Enclosure	Vented box
Transducers	1 x 18" woofer with 4" voice coil, neodymium magnet and paper cone
Connectors	Input signal: 2 x Neutrik speakON [®] NL4 Link input: 2 x Neutrik speakON [®] NL4 Link output: 1 x Neutrik speakON [®] NL4
MECHANICAL	
Stacking	Two-point SE AUDIOTECHNIK [®] stacking system
Cabinet	15-18 mm plywood, black or white polyurea coating
Dimensions [H x W x D] (Including rigging)	572 x 542 x 797 mm
Weight	41 kg
Hardware	2 x SE AUDIOTECHNIK [®] ergonomic handles, Octopus rubber feet, M20 pole thread

* Half space, 1W / 1m
** Based on RMS voltage
*** Max peak SPL = Sensitivity + 10log₁₀(Average Power) + 12 dB Crest factor

PRODUCT DESCRIPTION

General purpose, high performance portable 18" subwoofer with a 4" voice coil, 8 Ω, 2400 W Peak Power, 138 dB max SPL

PRODUCT DRAWING

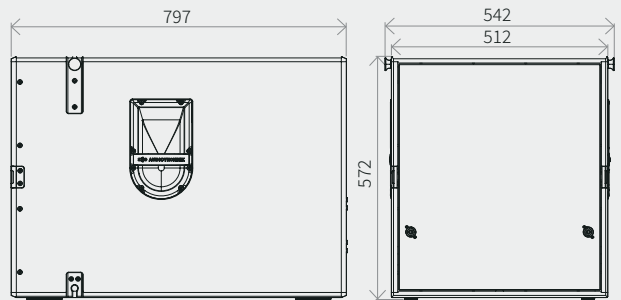

ACCESSORIES

B 18 DB	Dollyboard for B 18
B 18 PSC	padded slip cover for B 18
B 18 SFi M	M stacking frame for B 18 and M-F3A Pro (or M-F3A)
B 18 SFi L35	stacking frame for B18 with L35
M-F3A SPS 20	M20 Pole support to mount M-F3A PRO (or M-F3A) on top of our subwoofers

FREQUENCY RESPONSE CURVE

