

B 21 / B 21 W



PRODUCT FEATURES

- Adaptive Port Design, reduces distortion and airflow noise
- 6000 W peak power @ 8 Ω, 142 dB max SPL
- Extended Connectivity, convenient multiple speakON[®] sockets on front and rear, allowing easy set up, ideal for live performances
- 15-24 mm plywood housing
- Octopus Feet, increase slip resistance and stability
- Flexibility, smaller, lighter, scalable
- Suitable for various configurations
- Road-Ready, allows optimal packing and easy transport on euro-pallets and -trucks
- Additional Accessories: Dedicated dolly boards and padded slipcovers

SPECIFICATIONS


ELECTRO-ACOUSTICAL	
Low cut-off frequency (-3 dB)	34 Hz
Low cut-off frequency (-10 dB)	26 Hz
Nominal impedance	8 Ω
Sensitivity *	99 dB
Average power handling **	1500 W
Peak power	6000 W
Maximum Peak SPL ***	142 dB
Coverage	Omnidirectional
Enclosure	Vented box
Transducers	1 x 21" woofer with 5" voice coil, neodymium magnet and paper cone
Connectors	Input signal: 2 x Neutrik speakON [®] NL4 Link input: 2 x Neutrik speakON [®] NL4 Link output: 1 x Neutrik speakON [®] NL4
MECHANICAL	
Cabinet	15-24 mm plywood, black or white polyurea coating
Dimensions [H x W x D] (Including rigging)	666 x 585 x 832 mm
Weight	51 kg
Hardware	4 x SE AUDIOTECHNIK [®] ergonomic handles, Octopus rubber feet, M20 pole thread

* Half space, 1W / 1m
** Based on RMS voltage
*** Max peak SPL = Sensitivity + 10log₁₀(Average Power) + 12 dB Crest factor

PRODUCT DESCRIPTION

General purpose, high performance portable 21" subwoofer with a 5" voice coil, 8 Ω, 6000 W Peak Power, 142 dB max SPL


PRODUCT DRAWING

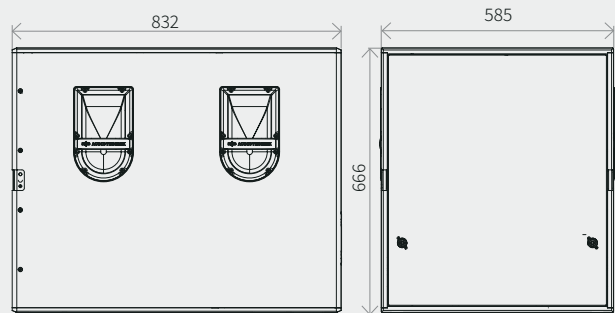

ACCESSORIES

B 21 DB	Dollyboard for B 21
B 21 PSC	padded slip cover for B 21
M-F3A SPS 20	M20 Pole support to mount M-F3A PRO (or M-F3A) on top of our subwoofers.

FREQUENCY RESPONSE CURVE

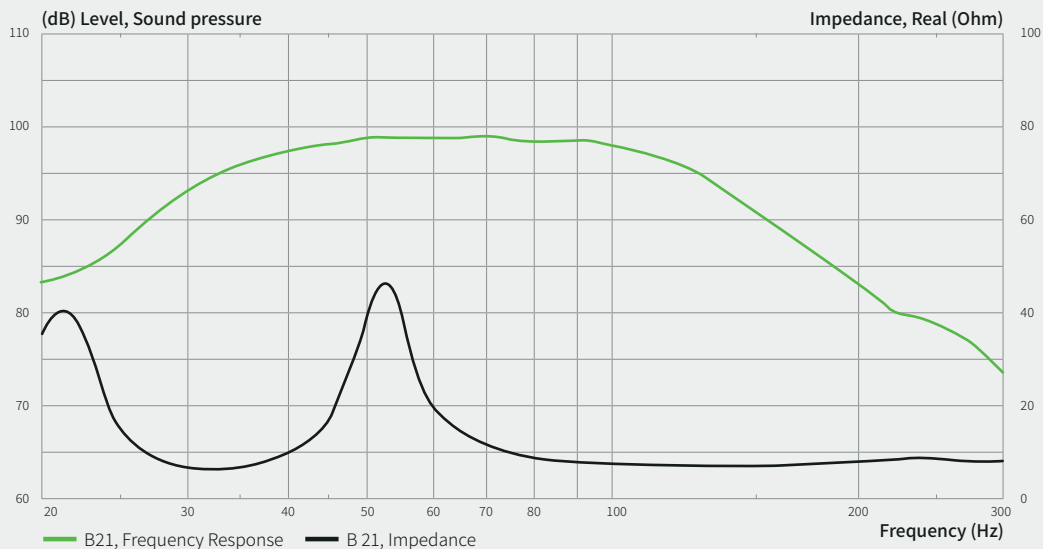

202001.1.01