

## V-L8/ V-LPS215B

V-L8是一款双8"可调角度的吊挂线阵，主要为音乐会等音响扩声系统和现场表演而设计，满足从小型到大型室内和室外场地扩声，每组音箱有650W额定操作功率。工程设计采用了音频回响凝结清除技术CATAR ( Clear Audio Time Aligned Responds )，它提供了一个杰出的声音再现。产品亦采用失真校正分析消除技术DECA ( Distortion Elimination Correction Analysis ) 确保高声压级上提供终极动态能力和纯净清晰的音质。能与各款V-LINE低音音箱完美组合。V-L8有白色版本可选。

V-LPS215B是一个带通式双15" RMS1200W低音音箱，低音充沛、厚实有力，与V-L8组合，能够形成一个高声压级和清晰的声音和出色的全面频响范围。

The V-L8 is a true mid size vertical line source concert system with variable curvature, primarily designed for a fair price/ value relation. The power handling is 650W RMS each top.

Engineered with CATAR Technology (Clear Audio Time Aligned Responds), it provides an outstanding sound reproduction. All V-L8 transducers are carefully engineered with our DECA Technology (Distortion Elimination Correction Analysis) insuring high SPL and clarity.

The V-L8 matches up perfectly with the subwoofers. White Version on request.

The V-LPS215B is a Dual 15" , 4th order Bandpass Subwoofer with 1200W RMS. Offering plenty of tight and punchy bass, the V-LPS215B blends beautifully with the V-L8 or V-L4 and from an excellent full range response with high SPL and clear sound.


### V-L8/ V-LPS215B




#### 3 参数规格 Parameters

型号名称 : V-L8	Model: V-L8
类型: 双8"二分频线阵扬声器	Type: Dual 8" Two Way Line Array Speaker
低音: 2 x 8" 钕铁硼单元	Woofer: 2 x 8" Neodymium Kevlar
高音号角: 1" 波导集束号角	Horn: 1" Wave Guide
压缩驱动器: 2 x 1" 钕铁硼单元 + 1.35"音圈	Compression Driver: 2 x 1" Neodymium with 1.35" voice coil
频率范围 : 70Hz-19KHz	Frequency Range: 70Hz-19KHz
低音功率 ( 额定/连续/峰值 ) : 500W / 1000W / 2000W	LF Power Capacity(Cont./Peak): 500W / 1000W / 2000W
高音功率 ( 额定/连续/峰值 ) : 150W / 300W / 600W	HF Power Capacity(Cont./Peak): 150W / 300W / 600W
推荐分频点 : 1.6KHz	Lowest possible Crossover Frequency: 1.6KHz
灵敏度 ( 高音/低音 ) 1W / 1M : 108dB / 100dB	SPL 1W / 1m: 108dB / 100dB
最大声压级 ( 高音/低音 ) 1W / 1M : 136dB / 133dB	Max.SPL 1W / 1m: 136dB / 133dB
阻抗: 16Ω	Impedance: 16Ω
投射角: 100° X 10°	Dispersion: 100° X 10°
连接器: 2x Neutrik NL-4	Connectors(In / Out): 2x Neutrik NL-4
保护: 高音保护	Protection: Tweeter Protection
喷漆/箱体材料: 6层Dura-Coat LX喷漆/18mm桦木多层板	Spray-paint / Cabinet Material: Dura-Coat LX / 18mm Birch Plywood
尺寸 ( WxHxD ) : 740 x 247 x 467mm	Dimension ( WxHxD ) : 740 x 247 x 467mm
重量: 27.5Kg	Weight: 27.5Kg
备用附件: 可附件页面	Available Accessory: see accessories page

#### 1 曲线图 Graph

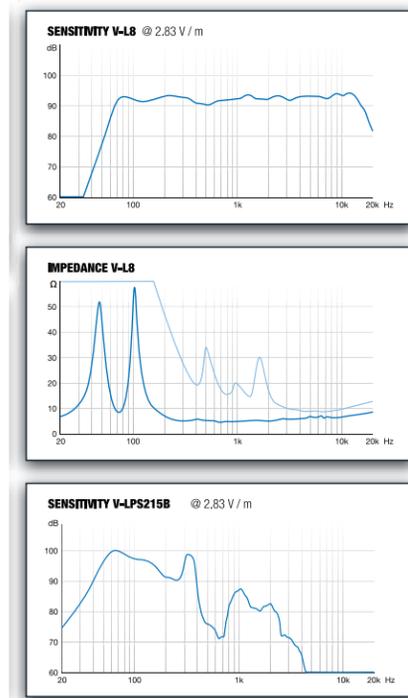

#### 2 结构图 Structure Diagram

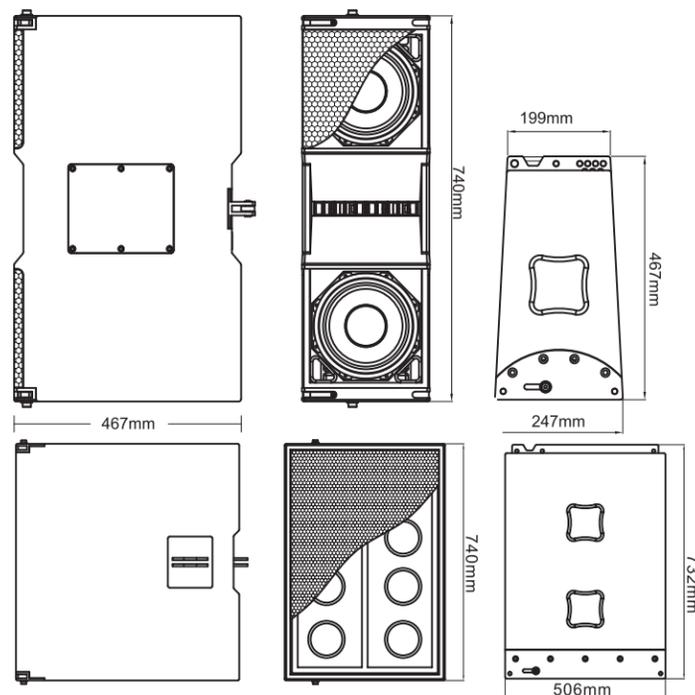

#### 4 参数规格 Parameters

型号名称 : V-LPS215B	Model: V-LPS215B
类型: 双15"倒相式重低音音箱	Type: Dual 15" , 4th order Bandpass Subwoofer
低音: 2 x 15" 低音 + 4" 音圈	Woofer: 2 x 15" with 4" voice coil
频率范围 : 34Hz-150Hz	Frequency Range: 34Hz-150Hz
低音功率 ( 额定/连续/峰值 ) : 1200W / 2400W / 3600W	LF Power Capacity(Cont./Peak): 1200W / 2400W / 3600W
灵敏度 ( 高音/低音 ) 1W / 1M : 100dB	SPL 1W / 1m: 100dB
最大声压级 ( 高音/低音 ) 1W / 1M : 131dB	Max.SPL 1W / 1m: 131dB
阻抗: 4Ω	Impedance: 4Ω
连接器 : 2x Neutrik NL-4	Connectors: 2 x Neutrik NL-4
喷漆/箱体材料: 6层Dura-Coat LX喷漆/ 18mm桦木多层板	Spray-paint / Cabinet Material: Dura-Coat LX / 18mm Birch Plywood
尺寸 ( WxHxD ) : 740 x 506 x 705mm	Dimension ( WxHxD ) : 740 x 506 x 705mm
重量: 81.5Kg	Weight: 81.5Kg
备用附件: 见附件页面	Available Accessory: see accessories page